



# TOW-TRUST TOWBARS

Tow-Trust Towbars Technical Support

Email - [technical@tow-trust.co.uk](mailto:technical@tow-trust.co.uk)

Phone: 01827 717412 / WhatsApp: 07778775135

## MAXUS DELIVER 9 VAN (2020 - 2025) & e-DELIVER 9 (2021 - 2025) FITTING INSTRUCTIONS

Part Number	PRO-PARK-LDV-1	Document Number	TECPRO-PARK-LDV-1
Issue Number	Issue 3	Vehicle Covered	Deliver 9 Van 2020 - 2025

### Contents

Item	Description	QTY	Item	Description	QTY	Item	Description	QTY
 CON-22750504CR	2 x Short Extension cables / 2 x Long Extensions	4	 ASG-17027	Parking Sensor Carrier	4	 ASG-17028	Parking Sensor Bung	4
 DT-PRO-PARK	Drilling Template	1	 PRO-PARK-AN12	120* 4.8 Cable Tie Black	4	 PRO-PARK-AM10 PRO-PARK-AM10Y	100* 2.5 Cable Tie Black 100* 2.5 Cable Tie Yellow	12 12


### Please note:

A PRO-STEP is NOT included and must be ordered separately.


A 27mm Hole Cutter is NOT included.



1  
Remove the bumper to gain access to the central reversing sensors.  
See separate instruction.

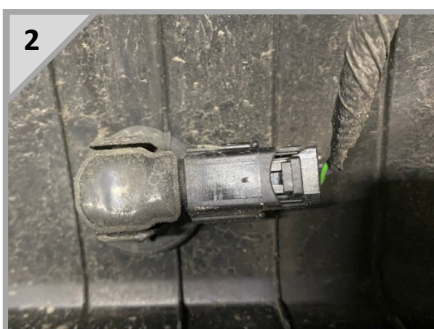

2  
Disconnect the OEM parking sensors and remove them from the carriers.

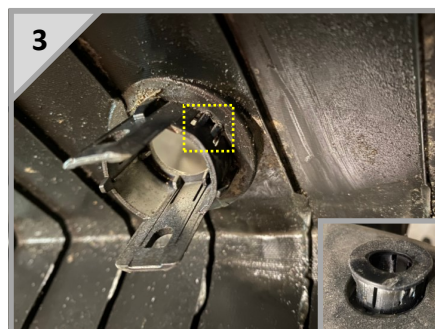

3  
Carefully remove the OEM carriers from the bumper. Press the 3 tabs in and pull them out from the front.



4  
Push the provided Tow-Trust carriers and bungs into the holes in the bumper in place of the OEM carriers.



5  
Push the centre OEM sensor Plugs through the holes in the crash beam to gain access to them once the bumper is re-fitted.



6  
Re-fit the bumper.  
See separate instruction.





# TOW-TRUST TOWBARS

Tow-Trust Towbars Technical Support

Email - [technical@tow-trust.co.uk](mailto:technical@tow-trust.co.uk)

Phone: 01827 717412 / WhatsApp: 07778775135

## MAXUS DELIVER 9 VAN (2020 - 2025) & e-DELIVER 9 (2021 - 2025) FITTING INSTRUCTIONS


Part Number

PRO-PARK-LDV-1

Document Number

TECPRO-PARK-LDV-1

7

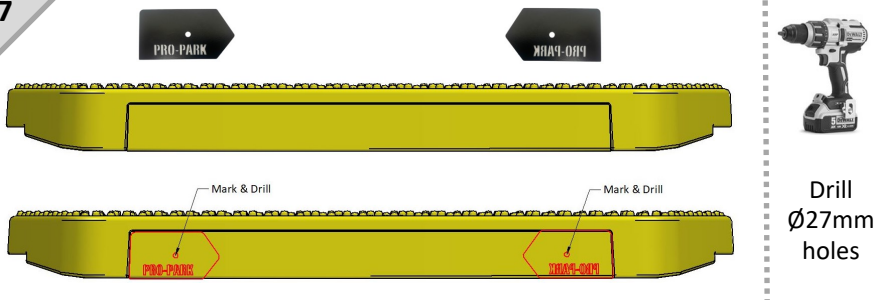


Using the **DT-PRO-PARK** drilling template place the template onto each step tread as shown above. Carefully mark and cut two 27mm holes for the carriers in each step tread.

8




Insert the OEM carriers into the step treads pushing them in from the front ensuring they are angled up.

9

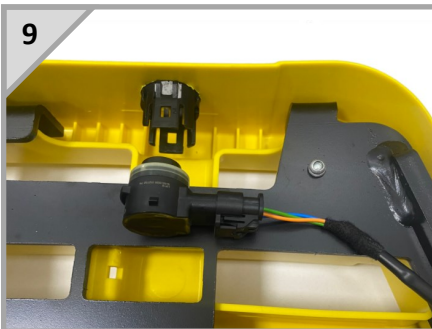

Connect the extension cables to the OEM sensors.

10

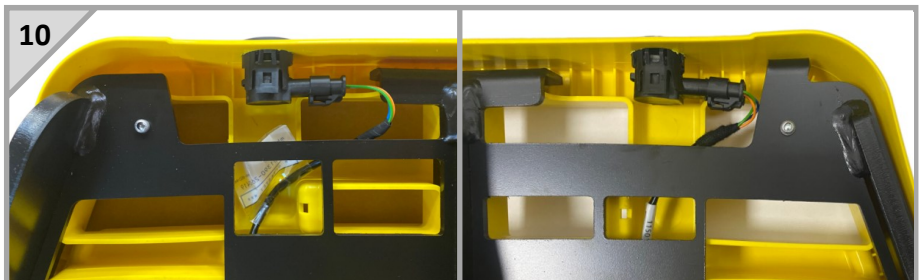

Short Cable on the inner channel of the tread

Long Cable on the outer channel of the tread


Insert the OEM parking sensors into the OEM parking sensor carriers ensuring all sensors point to the right in each tread (as above), ensuring they clip in correctly and route the cables through the channels in the step.

11




Secure the extension cables to the step using the small cable ties.  
(PRO-PARK-AM10Y Shown)

12



Fit the PRO-STEP in accordance with the fitting instructions supplied with the PRO-STEP.

13

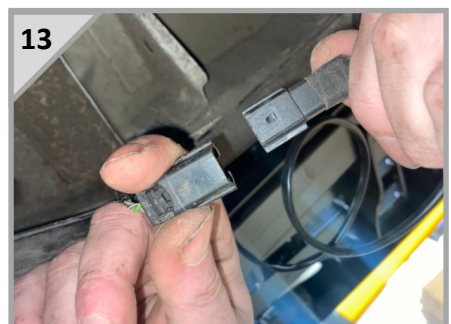

Connect the parking sensor cables to the original vehicle parking sensor connectors and use the larger cable ties to secure in place.

### IMPORTANT

Please ensure the PRO-STEP (**not supplied**) is fitted as per the installation instructions and all bolts are torqued to the correct torque setting.

**We are always here to support you!**

Call: 01827 717412

Email: [technical@tow-trust.co.uk](mailto:technical@tow-trust.co.uk)

WhatsApp: 07778775135

