


Issue 3

PRO COUP-F

Item	Qty	Description
A	6	M16 x 55 Flange Lock Bolts (10.9)
B	6	M16 Flange Lock Nuts (10.9)
C	2	Clamp Plates
D	1	Pro Coupling-F

1. Using Item A with Item B and Item C fix Item D to the Towbar Face plate ensuring the Towbar is sandwiched between Item D and Item C (as seen in section 3).
2. Always ensure the top tread is level with the outer treads and torque Item D to 252Nm.
3. Using Item A with Item B bolt your desired ball bracket to Item D and torque to 252Nm. (Tow-Trust Towbars Advise you either use a AJAW-2B or AJAW2B-WB).
4. **All Six Heavy Duty M16 Lock Fixings Must Be Used To Fit This Product.**

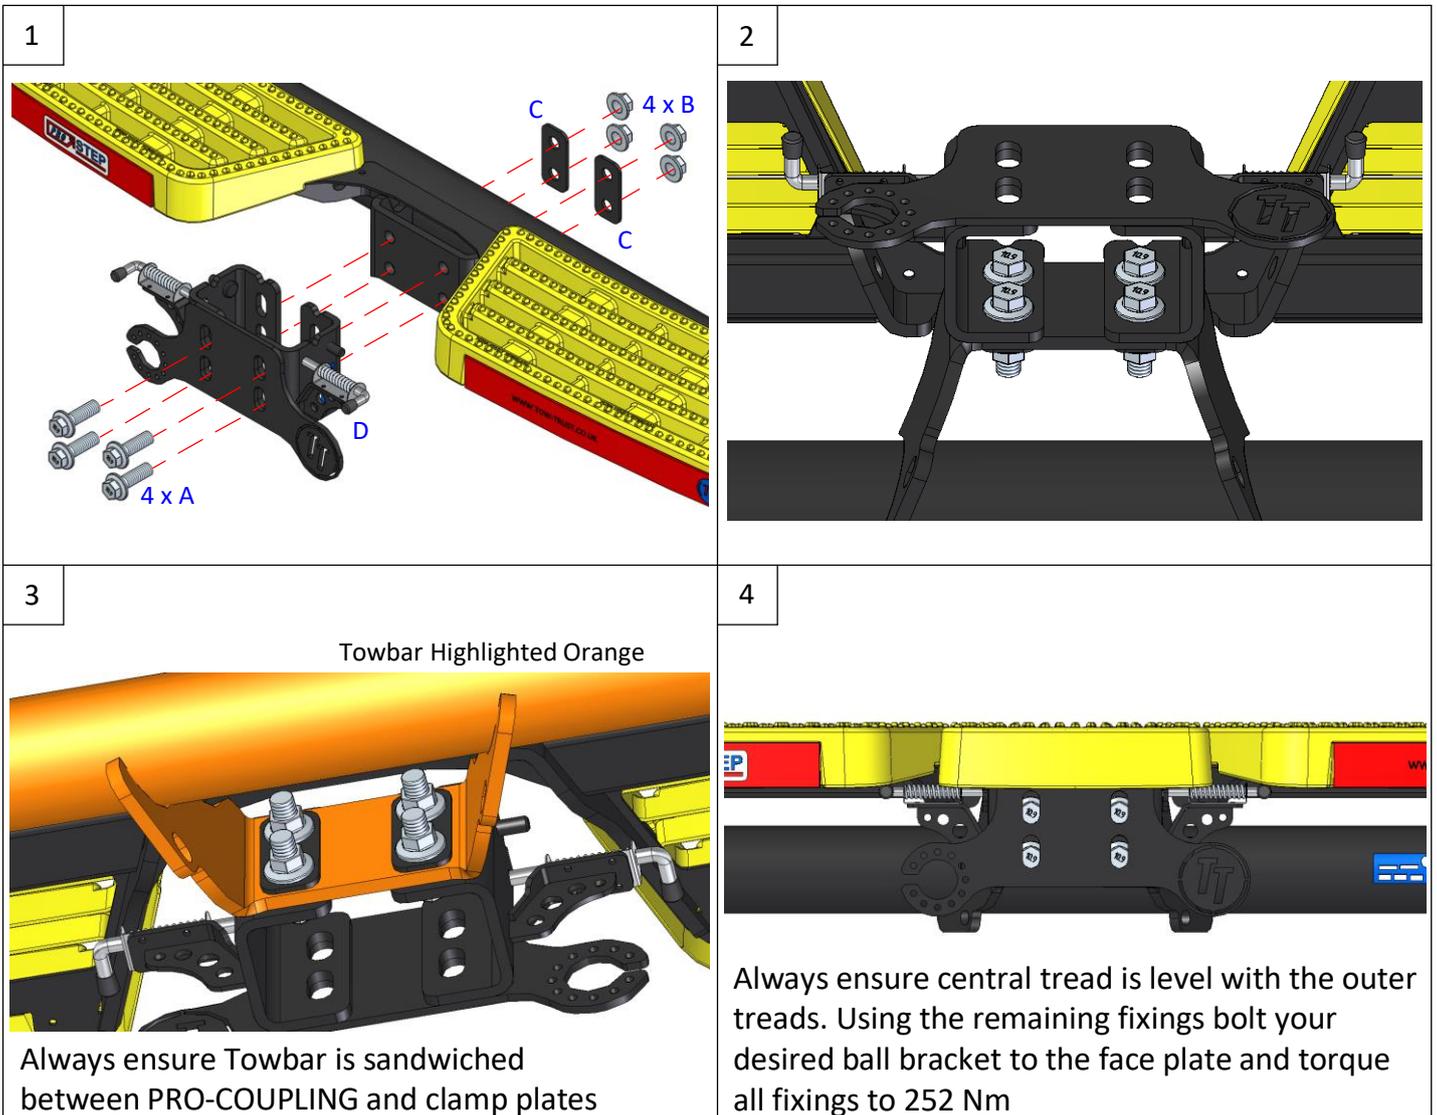

Note:

1. Nose load limits and vehicle manufacturers trailer / caravan weight limits must be observed.